


Plastic caps on the lifting key hole.


Ø 12mm Dia SS 316 Hinge Pin with Cotter Pin assy

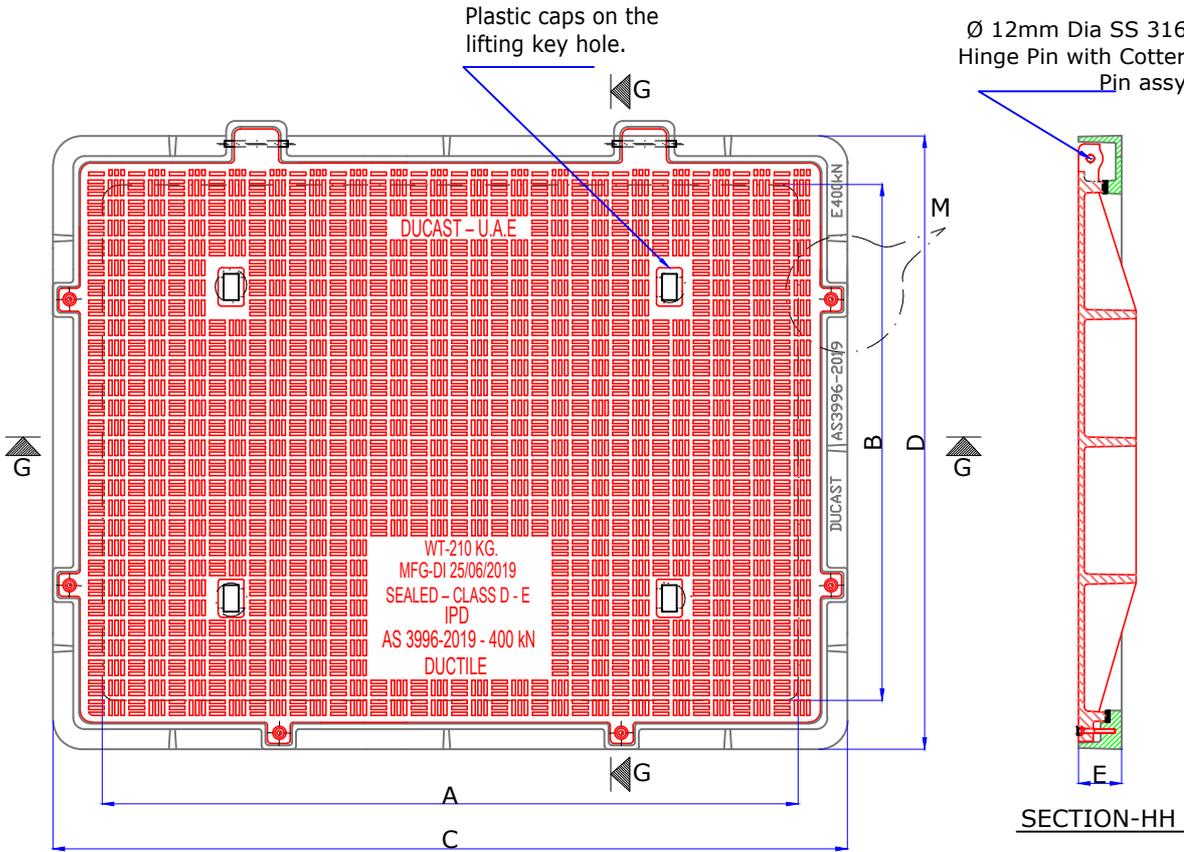


Plan View of Cover & Frame

SECTION-HH

EPDM Rubber Seal (Flat Type.)

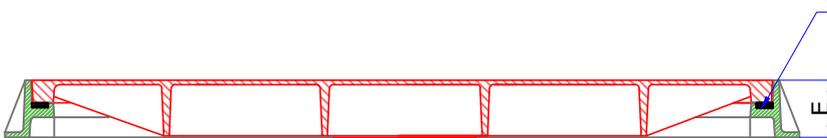


SECTION-GG



RAISED PATTERN DETAILS
 RAISED PATTERN THICKNESS 4.0MM

M-10 316 SS Allen Bolt - (8-Nos)



Sectional View -M
 Lockable Area

- Note :-Anti -Slip Design.
 :- Cover seating surface area will be machined if required .
 :- Black Bituminous Paint .

CODE	CLEAR OPENING AXB (mm)	OVER BASE CXD (mm)	DEPTH E (mm)	LOADING KN	STANDARD
DA- 9	1200X900	1370X1070	100	400kN	AS 3996-2019

DATE : 25-06-19	DESCRIPTION : 1200X900 MM CLEAR OPENING DUCTILE IRON SOLID TOP LOADING CLASS E 400KN COVER & FRAME WITH HINGED & BOLTED .	REV : 0
DRAWN BY : MKC		SCALE : NTS
CHECKED BY: AAB		ALL DIMENSIONS ARE IN MM
APP.BY: PC		